

Activor® Universal Gate Opener

Manual


March 2013

Applications

This universal remote control is specially designed to operate swing, sliding and boom gate, or garage door. The receiver can be easily fitted into gate controller box.

Wiring:

Six flying leads: Red/red	Power 12-27VAC/DC
Blue/blue	Relay output 1 NO
Yellow/yellow	Relay output 2 NO

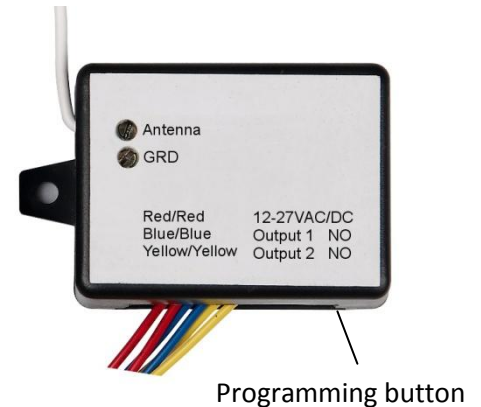

Operation:

Two remotes have been pre-learned to the receiver as part of kit. However it is easy to learn an additional remote or delete any remote.

How to learn a remote

1. Press and hold the programming button on the receiver for one second; LED on. The programming button is located at the bottom of the receiver
2. Press button 1 on the remote to learn. LED flashes 3 times and stays on for 4 seconds then off. Done.

How to delete all remotes

Press and hold programming button on the receiver for 5 seconds till LED turns off. LED flashes 10 times. Done.

How to delete a lost remote

1. Recall the remote which had been learned into the receiver right before the lost remote
2. Press and hold programming button on the receiver for 1 second; LED on.
3. Press Button 1 and Button 2 simultaneously; LED flashes 5 times and off; successfully deleting the lost remote.

Features:

- Specially designed for swing, sliding, and boom gate remote control
- Compact design: can be easily fitted into gate controller cabinet
- Large capacity of up to 1000 users
- 2 relay outputs: Normally Open
- Easy to add and delete a remote
- Antenna: detachable and extendable
- Power: 12-27VAC/DC – can take power directly from most motor control boards
- Remote options: stylish (RTW19); sliding cover (RTR01); water proof (RTO02)
- 433MHz; Keeloq rolling code
- All remotes can be fitted with a prox tag (125KHz or 13.56MHz)