


# Function programming.

TAB speaks clearly: you will understand perfectly straight away.

One function to open the lock, one function to mute the ringtone during a call, and even more functions for video door entry unit self-start and stair lighting activation. There are also 4 push buttons that can be programmed for intercom calls or auxiliary services. And the language used is iconographic: clear, simple and back-lit so that you know when your command has been carried out successfully.



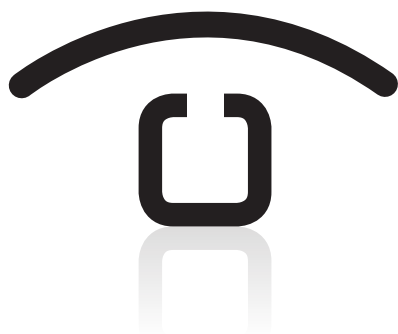

## Tab Free series - video door entry units

### Tab Free video door entry unit

Hands-free video door entry unit made of thermoplastic material with 3.5" LCD colour display. Equipped with keypad for the main video door entry functions: speak/listen, door lock release, self-start, auxiliary services (stair light), ringtone muting and 4 programmable additional buttons that can enable up to 4 auxiliary functions or intercommunicating calls.

It is possible to control: brightness, ringtone volume and muting when "User Away" function is activated. Possibility of ringtone type selection for calls made from different points, e.g.: external entrance panel, landing call, intercom call.

LED signalling of "door/gate open" and "Unanswered calls" (up to 4 calls with video door entry unit in ringtone muted mode).

For use in Elvox Due Fili Plus systems with power supply 6922 or 6922.1.

The video door unit is provided of the functions for hearing aid wearers.

### Conformity to standards

EMC Directive

### Main specifications

- Due Fili Plus Bus power supply.
- 3.5" LCD display.
- Video door entry unit made of ABS with mirror gloss finish on front panel.
- Touch-sensitive keypad with backlit symbols (during operation).
- Electronic ringtone: with diversification between 10 different melodies signalling entrance panel calls, intercom calls and landing calls.
- Input for landing call.
- Designed for surface mounting with metallic baseplate or fitting in a box (can be mounted directly onto the wall using wall plugs or to a 3-module flush mounting box or Ø 60 mm round flush mounting box or 56x56 mm flush mounting box).
- Video door entry unit dimensions: 131x150x26,5 mm.

### Technical data

#### Inputs

power supply from Bus	28 Vdc rated voltage
absorption stand-by	10 mA
max absorption operation	160 mA
operating temperature	0° to +40° C

### Adjustments and connections

A) Side adjustment of the volume.

B) Side adjustment of the brightness.

C) Terminal block for video door entry unit connection: to the Due Fili Plus system and to an external push-button for landing calls.

### Touch-sensitive keypad and indicator light signalling



Speak/listen button.



Self-start push button.



Lock opening push button.



Auxiliary 1 (Stair light): for auxiliary service.




Ringtone mute push-button and signalling of:

- (flashing light) incoming call from outdoor entrance panel or intercom device.
- (steady light) ringtone muted.
- (steady light that flashes every 10s, while the ringtone is muted) calls have been made from the entrance panel.


1 2 3 4

Programmable push-buttons for activating auxiliary services or intercom calls.

### Brightness and volume control and connection terminal block

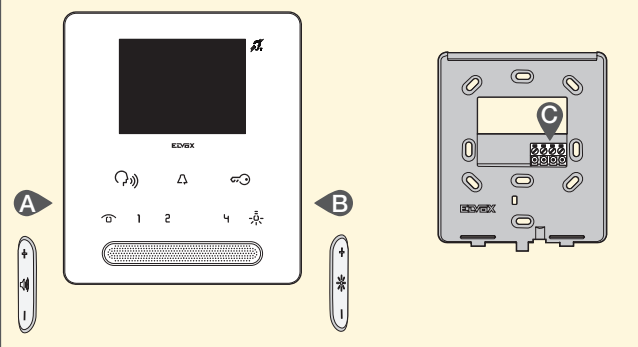

### Touch-sensitive keypad and indicator light signalling

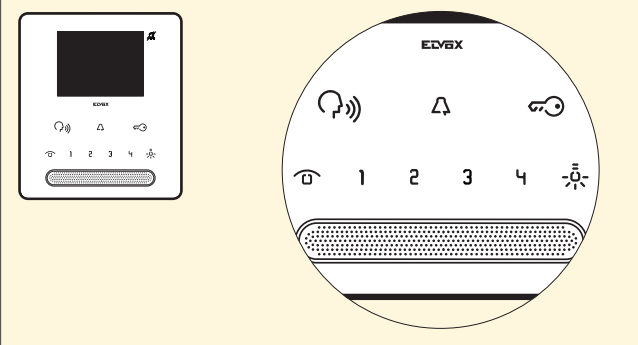

# Due Fili Plus video door entry systems



## Tab Free series - video door entry units

### Video door entry units

▲ 7539	Tab Free video door entry unit with 3.5" LCD display, capacitive keypad for interphone functions and intercoms calls, bracket for fixing in round or rectangular mounting boxes, white
▲ 7539/04	As above, black



▲ 7539  
white



▲ 7539/04  
black

### Accessories

* 753A	Table mounting box for Tab and Tab Free video door entry units and Tab jr. entry phone, white
* 753A/04	As above, black