

PHOTOCELLS RANGE

01

ACTIVE IR PHOTOCELLS

- 12-24 Vca/dc power supply
- Alignment test point
- Surface mounted



RX TX



FOTO30-A / FOTO30-B

30M*

02

BATTERY-POWERED PHOTOCELLS

FT25-B



RX TX

- Wired or 2-lithium battery power supply (ref. BATF - sold separate)
- Shielded amplifier on Rx for reduced interference
- Surface mounted
- Alignment test point
- Sensor bar input on transmitter



BATF



20M*

03

ADJUSTABLE PHOTOCELLS

FT12



- 12-24 Vca/dc power supply
- Surface mounted
- Polycarbonate base and housing, IP55
- Synchronisation (up to 2 devices combined)

ADJUSTABLE
180° →
4° ↑

12M*




04

PHOTOCELLS WITH EMBEDDED MOUNT

- Autotest input
- Shielded amplifier on Rx for reduced interference
- 12-24 Vca/dc power supply
- Alignment test point
- Embedded mount

35M*

FOTO35SDE

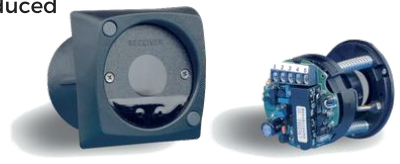

PHOTOCELLS RANGE

05 VANDAL-PROOF PHOTOCELLS

- Base in fiberglass and cast aluminium housing
- 12-24 Vca/dc power supply
- Surface mounted
- Synchronisation (up to 2 devices combined)



FT20-AV

20M*



ADJUSTABLE
180° →
4° ↑



FT30-AV

- IP55, cast aluminium base and housing
- 12-24 Vca/dc power supply
- Surface mounted
- Alignment LED indicator
- Front screws for easy installation

30M*



ADJUSTABLE SWIVEL
180° →
30° ↑

- IP65, stainless steel box
- 12-24 Vca/dc power supply
- Surface mounted
- Rubber caps with cable guide
- 3 angle fastening bracket (0°-90°-180°)
- Autotest input

20M*

FSTYLE25A



*Measured ranges will vary according to the equipment installation; the range may be reduced due to external interferences