

Q UVC-G5-BULLET

s Switching WiFi Camera Security Door Access Integrations Advanced Hosting

Bullet > [G5 Bullet](#)



G5 Bullet

UVC-G5-Bullet



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

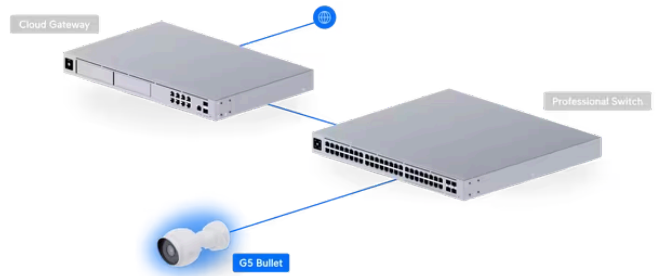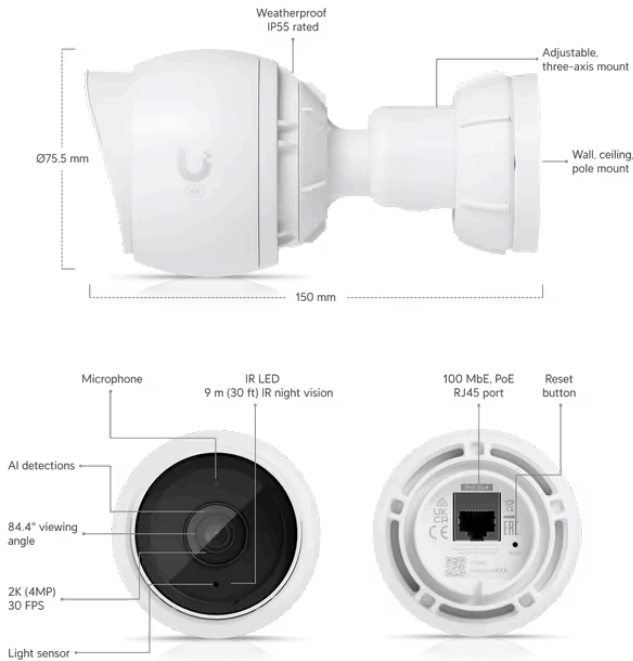

Overview

Without mount: $\varnothing 75.5 \times 74.4$ mm
($\varnothing 3 \times 2.9$ ")

Dimensions

With mount: \varnothing 75.5 x 150 mm
(\varnothing 3 x 5.9")

IR Night Vision	9 m (30 ft)
Smart Detections (People, Vehicles, Animals)	✓
Resolution	2K
Field of View	H: 84.4°, V: 45.4°, D: 99.8°
Audio	Microphone
Weatherproofing	IP55
Tamper Resistance	IK04
Mounting	Wall, ceiling, pole mount (Included) Junction box (Optional)

^ **Performance**

Networking Interface 10/100 MbE RJ45 port

Video

Image Settings Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

Max. Frame Rate 30 FPS

Resolution 4MP 2688 x 1512 (16:9)

Optics

Sensor 5MP CMOS

Lens Fixed focal length

Night Mode Built-in IR LED illumination and IR cut filter

^ **Hardware**

Max. Power Consumption 4W

Supported Voltage Range 37—57V DC

Power Method PoE

Processor Dual-core Arm® Cortex®-A7 based chip

Pole Mount Diameter	3/4" (19 mm)
Weight	Without mount: 225 g (8 oz) With mount: 315 g (11.1 oz)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy
Button	(1) Factory reset
Ambient Operating Temperature	-20 to 40° C (-4 to 104° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.