

PRIMO


24/7 SECURITY MONITOR

OPERATING INSTRUCTIONS

 **CLARITY_{AV}**

V1.1 MAY 2023

KEY FUNCTIONS

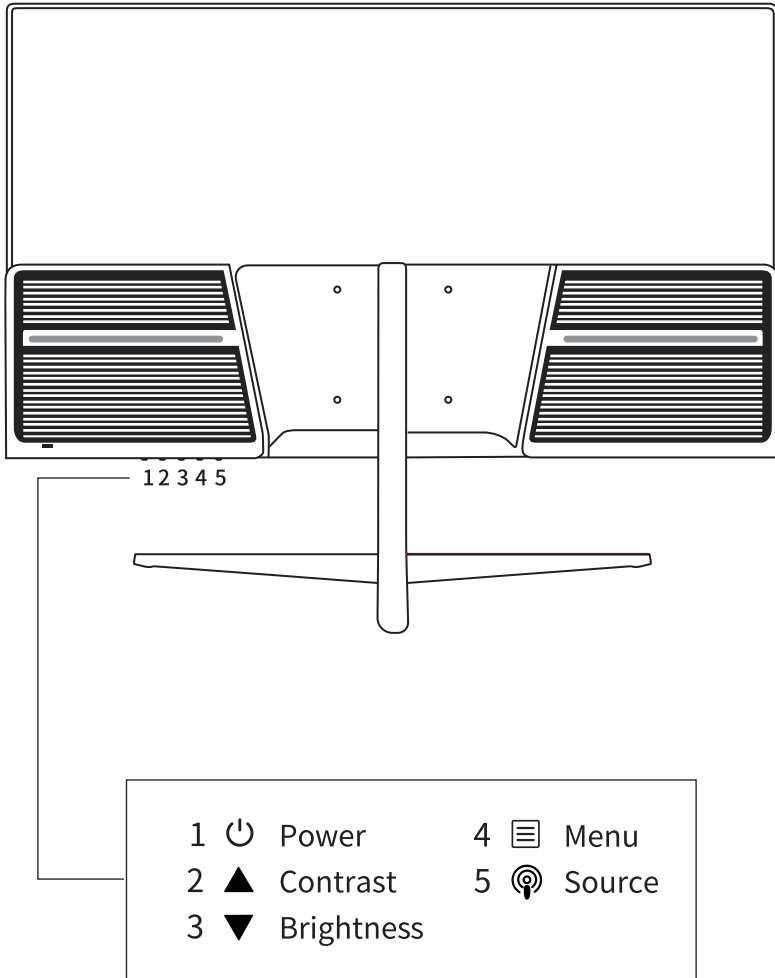

OPERATING INSTRUCTIONS

KEY FUNCTIONS (located under the lower right-hand edge of the monitor)

KEY 1  Power on / off

KEY 2  Contrast / when in menu mode, plus or up

KEY 3  Brightness / when in menu mode, minus or down

KEY 4  Menu / OK

KEY 5  Input source / return to upper menu


MENU MODE DETAILS

Note that Brightness & Contrast can be adjusted directly via Keys 2 & 3 or via Menu. Input Source can be selected directly via Key 5 (toggle) or via the Picture Menu.

MENU


After making changes, exit by pressing the Menu / OK button

Picture Select picture mode, colour temperature, aspect ratio and input source

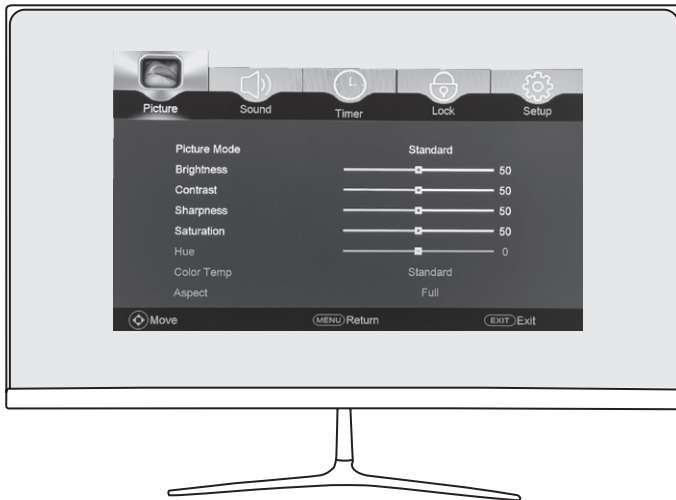

OPERATING INSTRUCTIONS

Sound Select sound mode; adjust treble, bass and balance

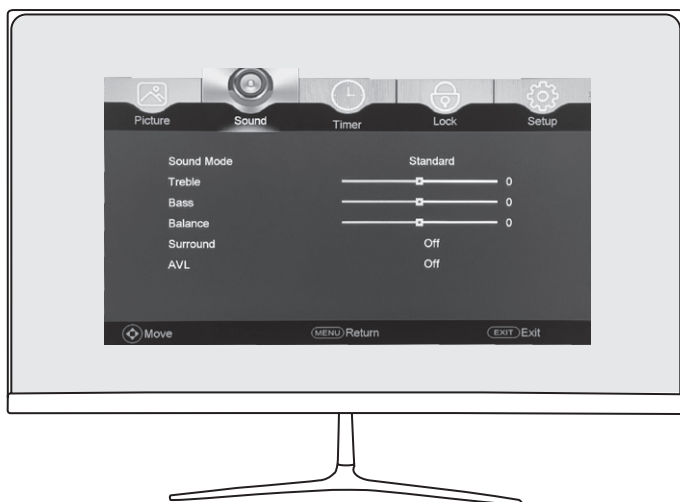

Timer Set screen off timer




OPERATING INSTRUCTIONS


Lock Enable/disable menu and input lock password



Setup Select OSD language, blue screen, software update, factory reset

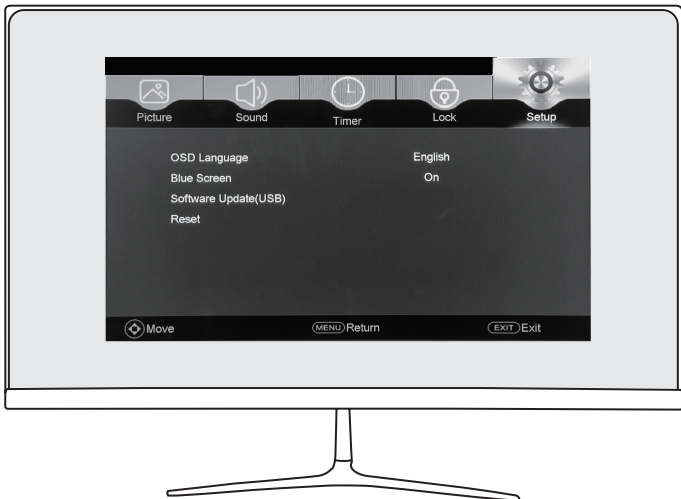

INPUT CONNECTIONS

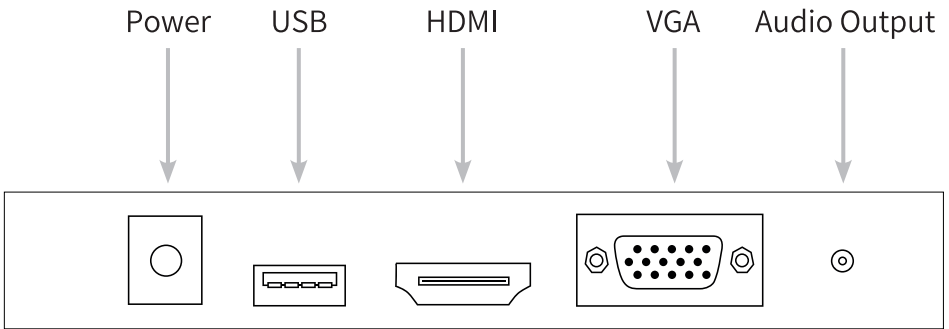

SPECIFICATIONS

Screen size	21.45"	23.8"	31.5"
Screen Type	LED TFT		
Aspect ratio	16:9		
Brightness	250 nit		
Contrast ratio	3000 : 1		
Response time	6.5 ms		
Colour depth	8 bit		
Visual angle	178 ° / 178 °		
Display colour range	16.7M		
Resolution	FHD 1920 x 1080 pixels (4K@30Hz compatible)		
Input port	HDMI, VGA		
Audio output	Stereo speaker, audio jack (3.5 mm)		
Power supply	12v DC / 25W	12v DC / 25W	12v DC / 35W
Shell material	Flame retardant plastic & metal		
Display screen dimensions	493x283x37mm	544x320x38mm	718x421x42mm
Mounting	Base(included) VESA(75mm x 75mm)	Base(included) VESA(75mm x 75mm)	Base(included) VESA(100mm x 100mm)
Included	HDMI cable, DC power supply		
Weight	2.1 kg	2.7 kg	4.9 kg
Operating environment	0° C to +50° C (20% to 80% RH - Non Condensing		
Storage environment	-20° C to 60° C (5% to 90% RH - Non Condensing		

specifications are subject to change without notice

WARRANTY & TECH SUPPORT

This product comes with a **2 year exchange warranty** from the date of purchase.

For technical support and warranty claims, please contact the installer who provided this monitor.

 **CLARITY**AV