



SMART4352PTEGRN

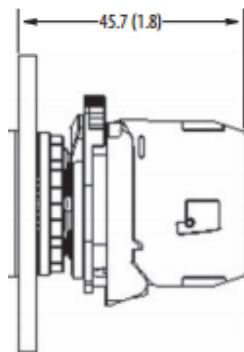

Momentary Mushroom Push Operators



| | |
|------------|------|
| OPERATOR A | 40MM |
|------------|------|

Technical Data

| | |
|-------------|---------------------|
| PLATE | STAINLESS FLAT |
| BUTTON TYPE | SPRING RETURN PRESS |
| HOLE (mm) | 22 (D) |
| PLATE (mm) | 115 (L) x 70 (W) |

Used for residential & commercial applications

Certifications: UR/UL, CSA, CCC, CE

Diameter, Operator: 40 mm

Standards Compliance: CE Marked NEMA I0947-5-5

Shock Tested at: 1/2 cycle sine wave for 11 ms; no damage at 100 G

Degree of protection: IP65

Material, Body / Housing: Plastic material

Material, Operator: Plastic material

Operator Action: Spring Return

Operator Type: E-Stop, Mushroom Head type

Mounting: 22.5mm Mounting

Mechanical durability: 10 000 000 Cycles Momentary push buttons, momentary mushroom

Operating forces: (typical with one contact block) Mushroom = 9 N

Temperature range: (operating) -25...+70 °C (-13...+158 °F)

Temperature range: (short term storage) -40...+85 °C (-40...+185 °F)

Wire / Conductor Size (Min): 0.75 mm² min

CE Marked: Yes

RoHS Approved: Yes

SMART4352PTEGRN

SMART STAINLESS FLAT GPO PLATE
GREEN SPRING RETURN PRESS BUTTON, TEXT
PRESS TO EXIT



Sprint Intercom & Security Pty Ltd ABN 13 003 762 641
1/7 Chaplin Drive Lane Cove NSW 2066 Australia
Telephone + 61 2 9429 6400 sales@sprintintercom.com.au
www.sprintintercom.com.au