



SMART4355PTEBLK

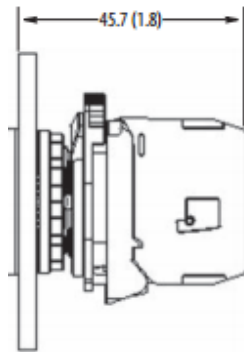

Spring Return Shrouded Push Button



OPERATOR	A	29.6MM
----------	---	--------

Technical Data

PLATE	STAINLESS FLAT
BUTTON TYPE	SPRING RETURN SHROUDED
HOLE (mm)	22 (D)
PLATE (mm)	115 (L) x 70 (W)

Used for residential & commercial applications

Certifications: UR/UL, CSA, CCC, CE

Diameter, Operator: 29.6 mm

Standards Compliance: CE Marked NEMA I0947-5-5

Shock Tested at: 1/2 cycle sine wave for 11 ms; no damage at 100 G

Degree of protection: IP65

Material, Body / Housing: Metal Shroud material

Material, Operator: Plastic material

Operator Action: Spring Return

Operator Type: Alternate Action Push Button

Mounting: 22.5mm Mounting

Mechanical durability: 10 000 000 Cycles Momentary push buttons

Operating forces: (typical with one contact block) Flush/extended = 5 N, E-stop = 36 N

Temperature range: (operating) -25...+70 °C (-13...+158 °F)

Temperature range: (short term storage) -40...+85 °C (-40...+185 °F)

Wire / Conductor Size (Min): 0.75 mm² min

CE Marked: Yes

RoHS Approved: Yes

SMART4365PTEBLK

SMART STAINLESS FLAT GPO PLATE
BLACK SPRING RETURN SHROUDED PRESS
BUTTON, TEXT PRESS TO EXIT



Sprint Intercom & Security Pty Ltd ABN 13 003 762 641
1/7 Chaplin Drive Lane Cove NSW 2066 Australia
Telephone + 61 2 9429 6400 sales@sprintintercom.com.au
www.sprintintercom.com.au