



# SMART4365EME

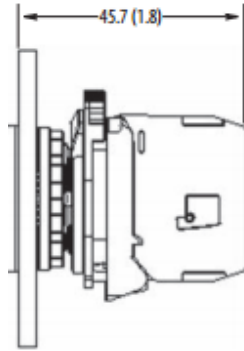

Spring Return Shrouded Push Button



OPERATOR A	29.6MM
------------	--------

## Technical Data

PLATE	WHITE PLASTIC
BUTTON TYPE	SPRING RETURN SHROUDED
HOLE (mm)	22 (D)
PLATE (mm)	115 (L) x 70 (W)

Used for residential & commercial applications

**Certifications:** UR/UL, CSA, CCC, CE

**Diameter, Operator:** 29.6 mm

**Standards Compliance:** CE Marked NEMA I0947-5-5

**Shock Tested at:** 1/2 cycle sine wave for 11 ms; no damage at 100 G

**Degree of protection:** IP65

**Material, Body / Housing:** Metal Shroud material

**Material, Operator:** Plastic material

**Operator Action:** Spring Return

**Operator Type:** Alternate Action Push Button

**Mounting:** 22.5mm Mounting

**Mechanical durability:** 10 000 000 Cycles Momentary push buttons

**Operating forces:** (typical with one contact block) Flush/extended = 5 N, E-stop = 36 N

**Temperature range:** (operating) -25...+70 °C (-13...+158 °F)

**Temperature range:** (short term storage) -40...+85 °C (-40...+185 °F)

**Wire / Conductor Size (Min):** 0.75 mm<sup>2</sup> min

**CE Marked:** Yes

**RoHS Approved:** Yes

## SMART4365EME

SMART WHITE PLASTIC GPO PLATE  
RED SPRING RETURN SHROUDED PRESS  
BUTTON, TEXT EMERGENCY



Sprint Intercom & Security Pty Ltd ABN 13 003 762 641  
1/7 Chaplin Drive Lane Cove NSW 2066 Australia  
Telephone + 61 2 9429 6400 sales@sprintintercom.com.au  
www.sprintintercom.com.au