



SMART4380EME

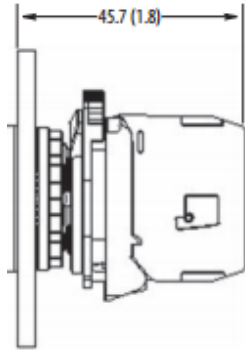

Keyed Twist-to-release Operators
40 mm,



Operator	A
40 mm	40 (1.57)

Certifications: UR UL CSA CCC CE RoHS

Diameter, Operator: 40 mm

Dielectric Strength: 2.5kV for 1 minute V AC

Operating Force: 3.6 N

Relative Humidity, Max: 95 %RH

Relative Humidity, Min: 50 %RH

IP Rating: IP65 IP66 IP69K

Material, Bezel: Glass-Filled Nylon / PA6 / PA66 (Polyamide 6)

Standards Compliance: NEMA ICS-5 UL 508 EN 60947-1 EN 60947-5-1 EN 60947-5-5 IEC 60947-1 ISO 13850

Material, Body / Housing: Plastic material

Material, Operator: Plastic material

Material, Spring: Stainless Steel

Mounting: 22.5mm Mounting

Operator Action: Keyed Twist to Release action

Operator Type: E-Stop, Mushroom Head type

Mechanical Service Life: 300000 cycles

Shock Acceleration (Max.): 100 g

Shock Duration (Max.): 11 ms

Operating Temperature, Max: 70 °C max

Operating Temperature, Min: -25 °C min

Storage Temperature, Max: 85 °C max

Storage Temperature, Min: -40 °C min

Wire / Conductor Size (Min): 0.75 mm² min

CE Marked: Yes

RoHS Approved: Yes

Technical Data

PLATE	STAINLESS CURVED
BUTTON TYPE	KEYED TWIST TO RELEASE
HOLE (mm)	22 (D)
PLATE (mm)	115 (L) x 70 (W)

Used for residential & commercial applications

SMART4380EME

SMART CURVED STAINLESS STEEL GPO PLATE
RED KEYED TWIST TO RELEASE BUTTON, TEXT
EMERGENCY



Sprint Intercom & Security Pty Ltd ABN 13 003 762 641
1/7 Chaplin Drive Lane Cove NSW 2066 Australia
Telephone + 61 2 9429 6400 sales@sprintintercom.com.au
www.sprintintercom.com.au