



# SMART4380PFA

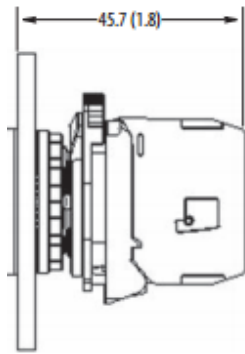

Keyed Twist-to-release Operators  
**40 mm,**



Operator	A
40 mm	40 (1.57)

**Certifications:** UR UL CSA CCC CE RoHS

**Diameter, Operator:** 40 mm

**Dielectric Strength:** 2.5kV for 1 minute V AC

**Operating Force:** 3.6 N

**Relative Humidity, Max:** 95 %RH

**Relative Humidity, Min:** 50 %RH

**IP Rating:** IP65 IP66 IP69K

**Material, Bezel:** Glass-Filled Nylon / PA6 / PA66 (Polyamide 6)

**Standards Compliance:** NEMA ICS-5 UL 508 EN 60947-1 EN 60947-5-1 EN 60947-5-5 IEC 60947-1 ISO 13850

**Material, Body / Housing:** Plastic material

**Material, Operator:** Plastic material

**Material, Spring:** Stainless Steel

**Mounting:** 22.5mm Mounting

**Operator Action:** Keyed Twist to Release action

**Operator Type:** E-Stop, Mushroom Head type

**Mechanical Service Life:** 300000 cycles

**Shock Acceleration (Max.):** 100 g

**Shock Duration (Max.):** 11 ms

**Operating Temperature, Max:** 70 °C max

**Operating Temperature, Min:** -25 °C min

**Storage Temperature, Max:** 85 °C max

**Storage Temperature, Min:** -40 °C min

**Wire / Conductor Size (Min):** 0.75 mm<sup>2</sup> min

**CE Marked:** Yes

**RoHS Approved:** Yes

## Technical Data

<b>PLATE</b>	STAINLESS CURVED
<b>BUTTON TYPE</b>	KEYED TWIST TO RELEASE
<b>HOLE (mm)</b>	22 (D)
<b>PLATE (mm)</b>	115 (L) x 70 (W)

Used for residential & commercial applications

## SMART4380PFA

SMART CURVED STAINLESS STEEL GPO PLATE  
RED KEYED TWIST TO RELEASE BUTTON, TEXT  
PRESS FOR ASSISTANCE



Sprint Intercom & Security Pty Ltd ABN 13 003 762 641  
1/7 Chaplin Drive Lane Cove NSW 2066 Australia  
Telephone + 61 2 9429 6400 sales@sprintintercom.com.au  
www.sprintintercom.com.au