

SS-40

SURFACE MOUNT CONTACTS

1.24"L x .31"W x .31"H Surface Mount Type W/Super Stick Adhesive



Contact Size: 1.24"L x .31"W x .31"H

(33mm x 8mm x 8mm)

Standard Magnet Size: 1.24"L x .31"W x .31"H

(33mm x 8mm x 8mm)

Standard Gap: .71"(18mm)

Colors: White, Brown

12"(305mm) 22 AWG Leads Standard

Longer leads available

Specifications

Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
SS-40	.71"(18)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
* SS-41B Special Order	.59"(15)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
* SS-42C Special Order	.59"(15)	SPDT	SPDT	3	100	AC30/DC30	0.2





OPERATING TEMPERATURE: -40°C to +60°C

*SPECIAL ORDER - Call for Min. Order Qty. - Leadtime - Pricing

Outline Dimensions

Unit: inch(mm)

SS-40/SS-41B

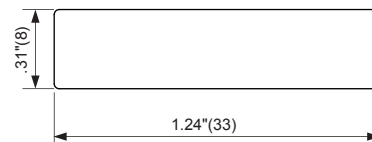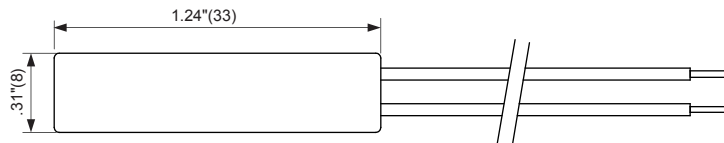

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com





SS-40

SURFACE MOUNT CONTACTS


Outline Dimensions

Unit: inch(mm)

SS-42C

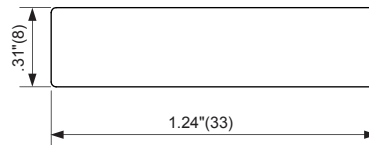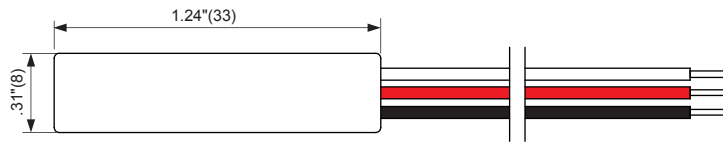

SS-42C Wiring Diagram

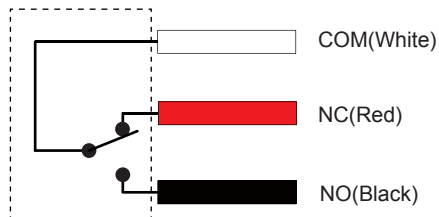

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com