

**ACCESS COMMUNICATIONS PTY LTD
Specification**

HIGH GRADE TRANSPARENT SPEAKER CABLE (OXYGEN FREE COPPER)


ACCESS CAT # Y3420

Version: A-001
Page 1 of 1

1. CONSTRUCTION

| ITEM | | A.Q.L. | DESCRIPTION |
|------------|--------------------------|--|--|
| Conductor | Core number / millimetre | 189 strands (+/- 3) | Stranded bare copper (OFC) (OXYGEN FREE) |
| | 2 / 0.10mm x 27 x 7 | 0.10mm (+/- 0.008mm) | |
| Insulation | External dimension (mm) | 5.30mm (+/- 0.50mm) 10.3mm (+/- 0.80mm) | 1 round core and 1 square core - transparent PVC insulation with stripe on one side and markings on |
| | 5.30 x 10.30mm PVC | | |

2. DESIGN

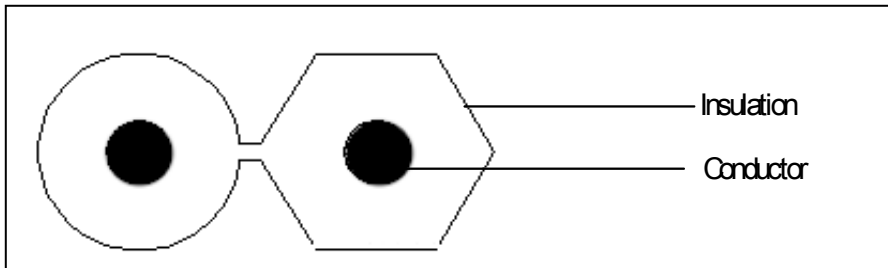

3. CHARACTERISTICS

| ITEM | DESCRIPTION | STANDARDS |
|------------|--|-----------------------|
| Cond res | conductor DC resistance @ 20 degrees C | <1.48 Ω per 100 metre |
| Insul res | insulation resistance @ 20 degrees C | >200 MΩ per metre |
| Rated temp | ----- | 70 degrees C |
| Other | ----- | ----- |

C-2093

Date: 050322