


EHMEE1234R - Housing Mount Extender

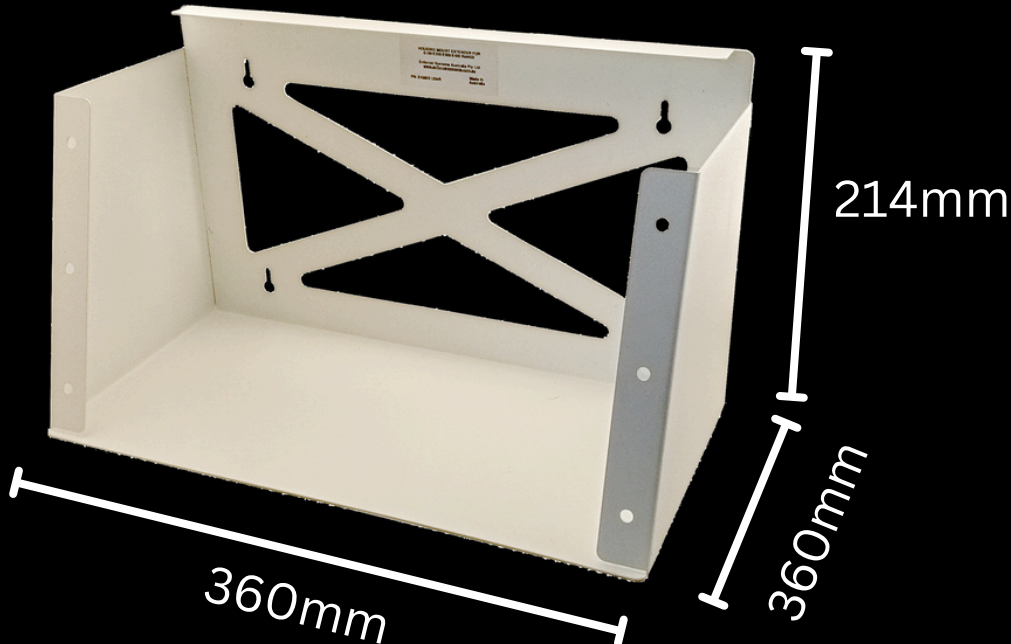

Measurements & Weight:

L: 360mm

W: 360mm

H: 214mm

Weight: 1.60kg

Suitable for :

E100CPM/MCU, E100CPM/SU

E200CPM/MCU, E200CPM/SU

E300CPM/MCU, E300CPM/SU

E400CPM/MCU, E400CPM/SU

In a wall-mount application, housing mount extender is used to achieve a desirable deployment angle and PIR detection coverage.

By simply marking the ideal position on the wall, the bracket can be installed using suitable anchors and screws.

Once the housing mount extender has been installed, the housing mount is secured on to the extender using six bolts supplied.

To achieve maximum system performance, the installation height must be between 2.4 - 3.6 meters. This system is designed with a 15° tilt angle, this prevents the smoke curtain from being deployed directly along the wall.