


Pyramid Series Proximity™ Reader

Models P-300 Cascade and P-500 Alps

- Significantly lower cost than competing OEM proximity readers
- Sleek attractive packages
- Ultra Thin profile
- Industry standard pass through Wiegand output for compatibility with any access system
- Available in several colours
- Scratch resistant finish

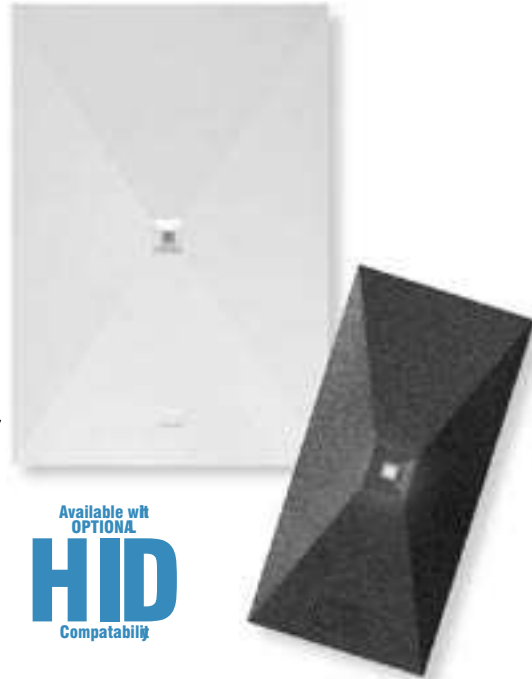

Keri's single piece **Pyramid Series Proximity Readers**, featuring optional HID compatibility, are designed to blend aesthetics, performance, and small package size with an ultra thin profile into a product that is priced significantly less than competing proximity readers. The readers can be used on virtually any manufacturer's access control system because they produce an industry standard Wiegand output, feature configurable LED and audio tone options, and provide very low power consumption. They have several built in diagnostic functions including a start up self check and a data line test mode. Additionally, they are small and thin enough that they can be easily incorporated into an OEM package should the system manufacturer wish to design their own reader housings.

The first readers in the series are the **P-300 Cascade Reader** and the **P-500 Alps Reader**. The P-300 may be the world's smallest single piece proximity reader at only 3.0 long x 1.5 wide x 0.49 inches thick (76 x 38 x 12mm). It is designed to be mounted on a standard metal door or window frame (mullion) and can be mounted on any metal or non-metal surface without loss of read range. Read range is up to 4 inches (102mm).

The P-500 is a single piece wall mount reader that can be mounted on a flat surface or affixed to a standard U.S. single gang electrical box. Read range is up to 5 inches (127mm) when mounted at least 0.5 inch (13mm) off metal. A 0.5 inch (13mm) stand off is provided with each P-500 reader. Size is 4.5 long x 3.0 wide x 0.38 inches thick (114 x 76 x 10mm). Its thin, sleek profile makes it a much more attractive device to install in the workplace than other readers available on the market.

The Pyramid Readers are compatible with Keri's new **PSC-1 Light Proximity Card**, **PSI-4 Image Technology Proximity Card** and **PSM-2 Multi Technology Proximity Card** as well as the small, extremely robust **PSK-3 Proximity Key Ring Tag**. The new cards and tags can be programmed to match any customer's Wiegand protocol as well as standard 26 bit format. The readers utilise pass-through technology in that any Pyramid Series card or tag will work on any Pyramid Series reader, regardless of the programmed card/tag format.



Unit 1/5A Pioneer Avenue
Tuggerah NSW 2259
Tel: +61 2 4353 0466 • Fax: +61 2 4353 0477
email: sales@keri.com.au • web: www.keri.com.au

DATA SHEET

Pyramid Series
Proximity Readers